

SC320

PEDESTAL EMERGENCY EYEWASH




PRODUCT DESCRIPTION

- Floor emergency eyewash equipment.
- High water flow and low water pressure with total way out valve.
- Instant automatic opening and closing activated by lateral lever.
- Double aerated jet with dust cover.
- Green color RAL 6029.
- Suitable for industries, laboratories and generally where there is risk of personal damages from fire, acids, chemical reactants, petroleum products, radioactive materials or other contaminants.
- CE conformity.

TECHNICAL DATA

- Eyewash basin bowl Ø255mm in green polypropylene.
- Manufactured made of galvanized zinc steel with epoxy paint.
- Connecting parts in brass.
- Minimum water supply pressure 1,5 bar - maximum 5 bar.
- Water flow rate: 14 l / min \pm 10%.
- Water inlet: 1/2" thread.
- Water outlet: 1 1/4" thread

TECHNICAL DRAWING

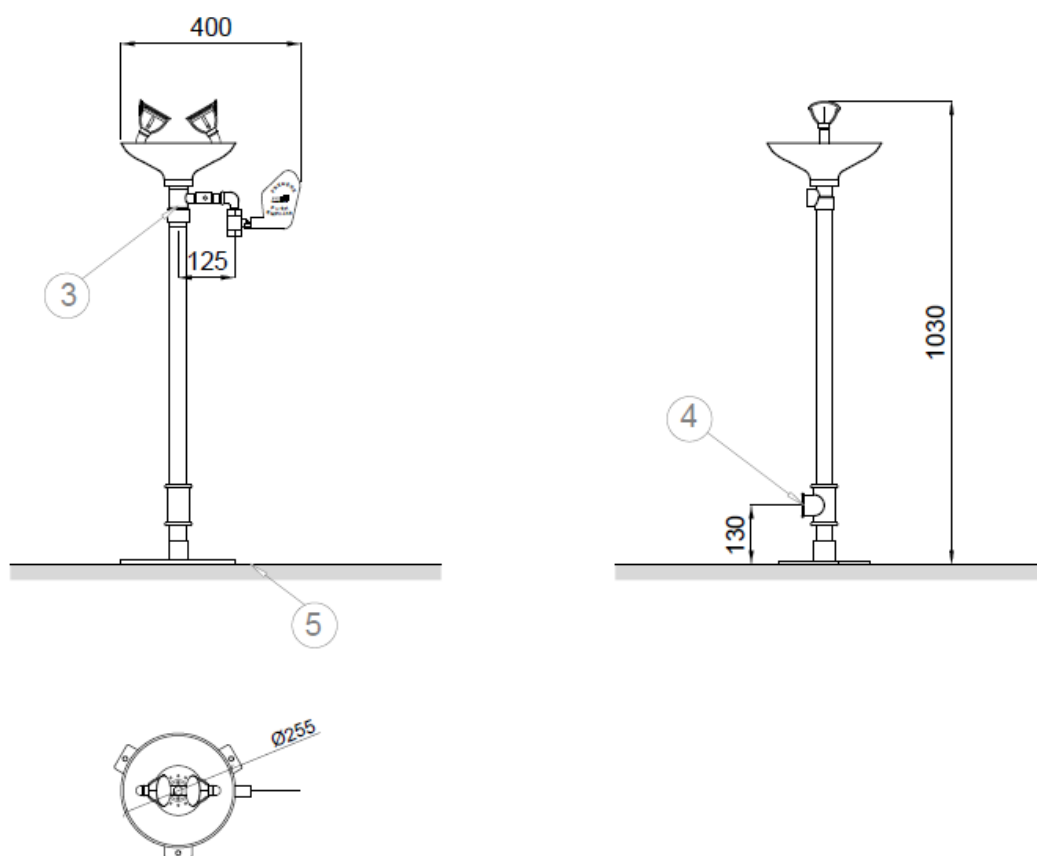

3 INGRESSO 1/2" G, FILETO FEMMINILE
ENTRADA DE 1/2" G, ROSCA HEMBRA.
1/2" G, INNER THREAD INLET.
ENTRÉE DE GAZ 1/2", FEMELLE.

4 USCITA 1 1/4" G, FILETO FEMMINILE
SALIDA DE 1 1/4" G, ROSCA HEMBRA.
1 1/4" G, OUTLET THREAD INLET.
SORTIE 1 1/4" G, FILETAGE FEMELLE.

5 PAVIMENTO FINITO.
SUELO ACABADO.
FINISHED FLOOR.
SOL FINI.