

PORTABLE PRESURIZED EYE WASH UNIT**PRODUCT FEATURES**

The eye wash unit consists of:

- Eyewash body with soft rubber handlers.
- Aerated water flow activated by retention leverage.
- 1,5 m flexible hose.
- Stainless steel tank. Capacity: 18 liters drinking water, refillable pressurized at 6 bar.
- Pressure indicator and overload valve.

TECHNICAL FEATURES

- Capacity: 18 liters.
- Work pressure: 6 bar.
- Maximum opening valve: 7/9 bar
- Water flow: 6l / min.
- Water tank dimensions: 630 height, 220 Ø (mm).

SUGGESTED USE

In case of accidental chemical, acid or corrosive contamination, it guarantees an immediate and safe cleaning.

MANIPULATION


The unit is filled with 15 liters of potable water and pressurized to 6 bar of air taken from a compressed air compressor.

In case of use press the lever of the shower to drain the flow of water under pressure.

MAINTENANCE

- Store in a cool, dry place away from heat sources and protected from light.
- Periodically check the pressure at the pressure manometer.
- In case the pressure detected by the pressure indicator is below 4 Atm, restore with the help of a source of compressed air.
- Adjustable airflow through integrated device, built according to EN 15154-1-2.

DIMENSIONAL DRAWING

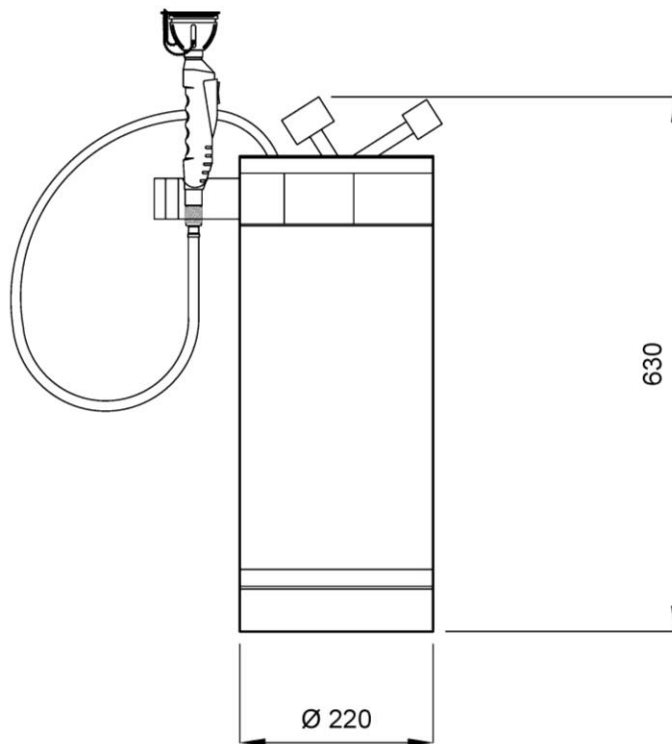

DIMENSIONS IN mm.