
SC700X

EMERGENCY SHOWER AND EYEWASH



PRODUCT DESCRIPTION


- Total way out valve shower, manual and instant opening.
- Emergency eyewash with high flow at low pressure.
- Emergency shower activated through rigid lever with triangle handle.
- Emergency eyewash activated through side lever.
- Double aerated jet with dust cover.
- Stainless Steel tube.
- Suitable for industries, laboratories and generally where there is risk of personal damages from fire, acids, chemical reactants, petroleum products, radioactive materials or other contaminants.
- CE conformity.

TECHNICAL DATA

- Shower head Ø255mm and eyewash bowl Ø255mm made of stainless steel.
- Manufactured body made of stainless steel.
- Connecting parts made of stainless steel.
- Min. required water flow: 6 liters / minute (2 bar).
- Eyewash flow: 14 liters / minute \pm 10%.
- Emergency shower flow: 120 liters / minute (3bar).
- Water inlet: 1+1/4" thread.
- Water outlet: 1+1/4" thread.

SC700X

TECHNICAL DRAWING

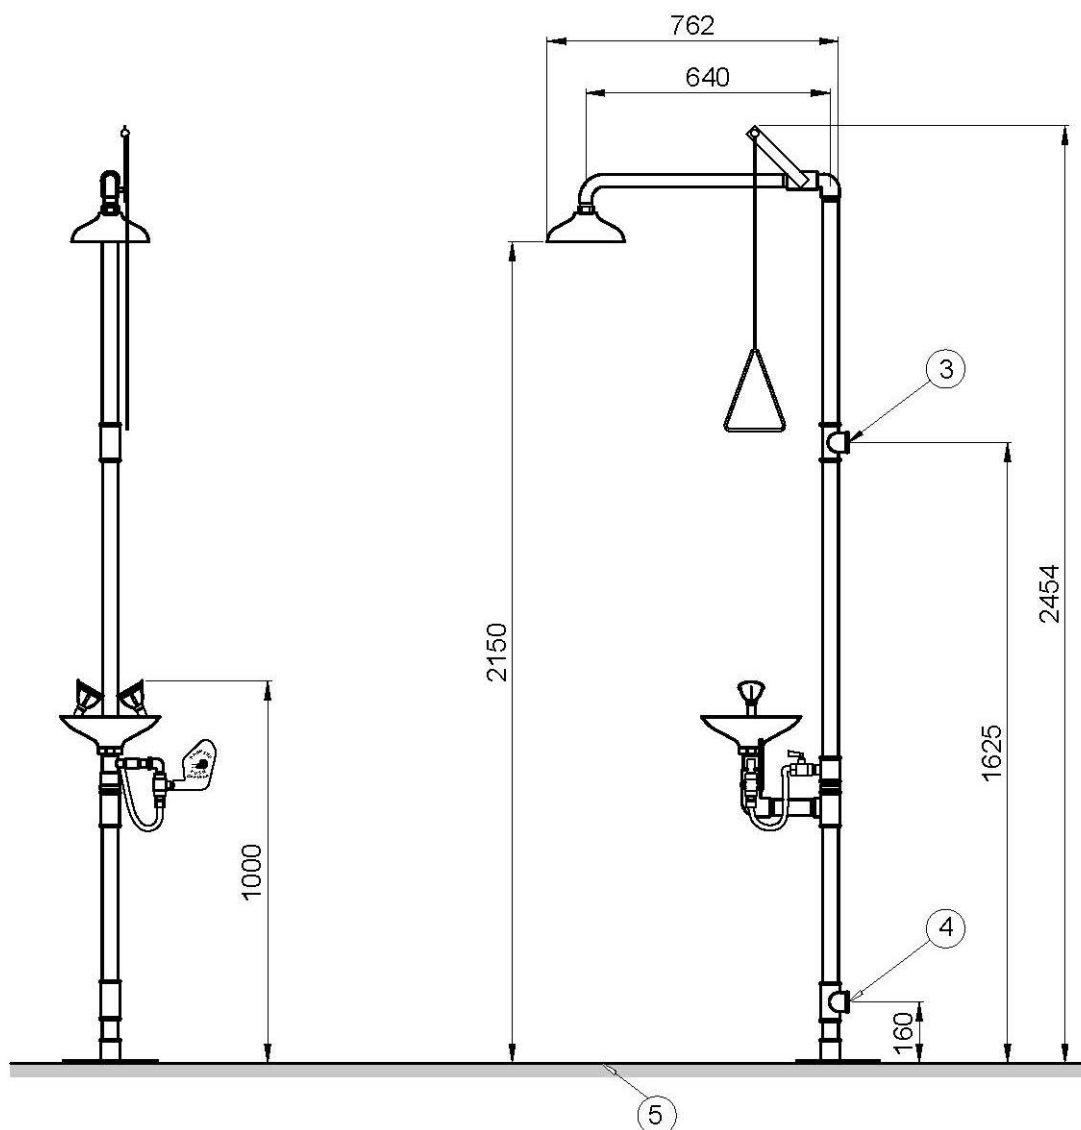

③ INGRESSO 1 1/4" G, FILETTO FEMMINILE
ENTRADA DE 1 1/4" G, ROSCA HEMBRA.
1 1/4" G, INNER THREAD INLET.
ENTRÉE 1 1/4" G, FILETAGE FEMELLE.

④ USCITA 1 1/4" G, FILETTO FEMMINILE
SALIDA DE 1 1/4" G, ROSCA HEMBRA.
1 1/4" G, INNER THREAD OUTLET.
SORTIE 1 1/4" G, FILETAGE FEMELLE.

⑤ PAVIMENTO FINITO.
SUELO ACABADO.
FINISHED FLOOR.
SOL FINI.