




COMPONENTS

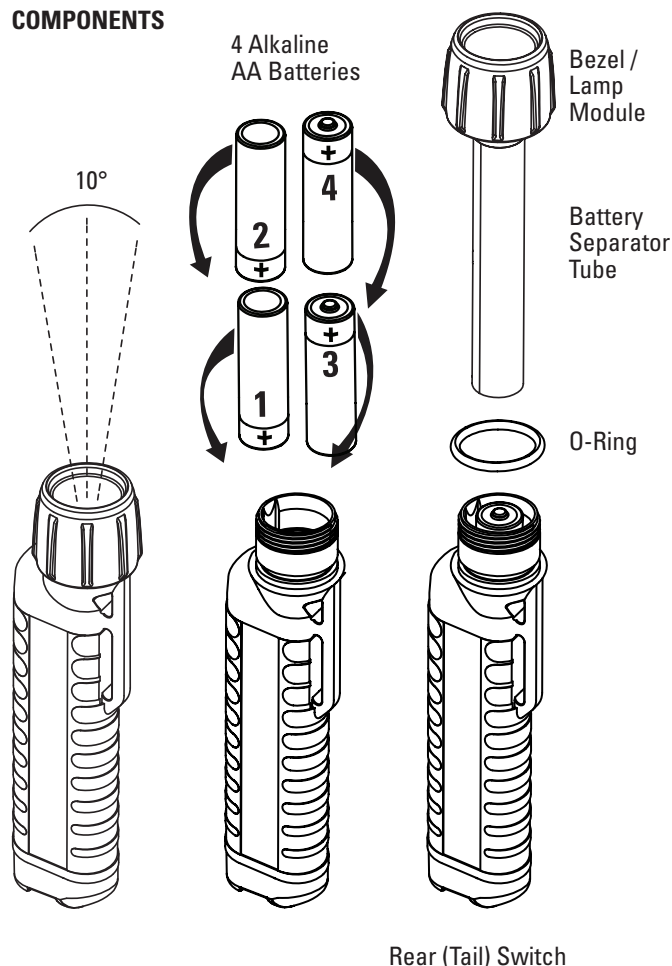

LIGHTS / ART.-NO.

UK 4AA eLED RFL:

514603F safety yellow, incl. batteries, single pack


514607 safety yellow, no batteries, bulk

ACCESSORIES

14816 Nylon belt holster for 3AA / 4AA lights

14819 Helmet clip universal for 2AA / 3AA / 4AA lights

14877 Wand, traffic director for 2AA / 3AA / 4AA lights

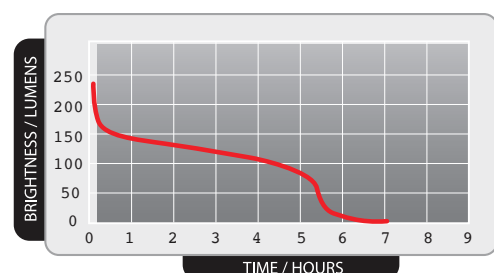

TECHNICAL NAME

UK 4AA eLED ET11P

CERTIFICATION (ATEX)

SEV 17 ATEX 0158 X

II 1G Ex ia IIC T4 Ga

II 1D Ex ia IIIC T₂₀₀ 135°C Da



Intrinsically safe: Zone 0, 1, 2, 20, 21, 22

Batteries: (4) 1.5 V Alkaline AA / LR6 / Mignon cells -
DURACELL OEM (duralock) LR6/AA,
DURACELL INDUSTRIAL LR6/AA,
DURACELL PLUS POWER LR6/AA,
Energizer INDUSTRIAL LR6/AA,
Energizer ULTIMATE LITHIUM L91,
RAYOVAC AA (4006),
VARTA LONGLIFE LR6/AA (4106),
VARTA HIGH ENERGY LR6/AA (4906),
VARTA LONGLIFE Power LR6/AA (4906)

Permissible temp range: -20°C to +40°C except for use with
Energizer INDUSTRIAL (-20°C - +30°C)

TECHNICAL DATA

Model: 4AA eLED RFL

PERFORMANCE DATA

Light Source: eLED

Color Temperature: 5000K-5700K

Brightness: 225 lumens

Beam Angle: 10°

Beam Distance: 121 m

Batteries: (4) 1.5 V Alkaline AA / LR6 / Mignon cells

Run Time: 5,5 hrs

Weight: 158 g incl. batteries


Dimensions: 15,75 x 4,06 x 3,56 cm

Waterproof: 1 m

Enclosure Protection: IP67

Materials: ABS/Polycarbonate, Lexan, Polyurethane mix

Origin: Made in USA

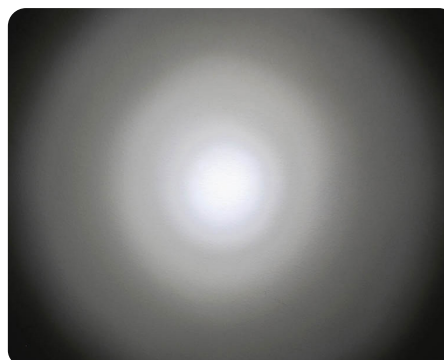

REV10/2022. Subject to change at any time. Errors and omissions reserved.